




DualSort Basic

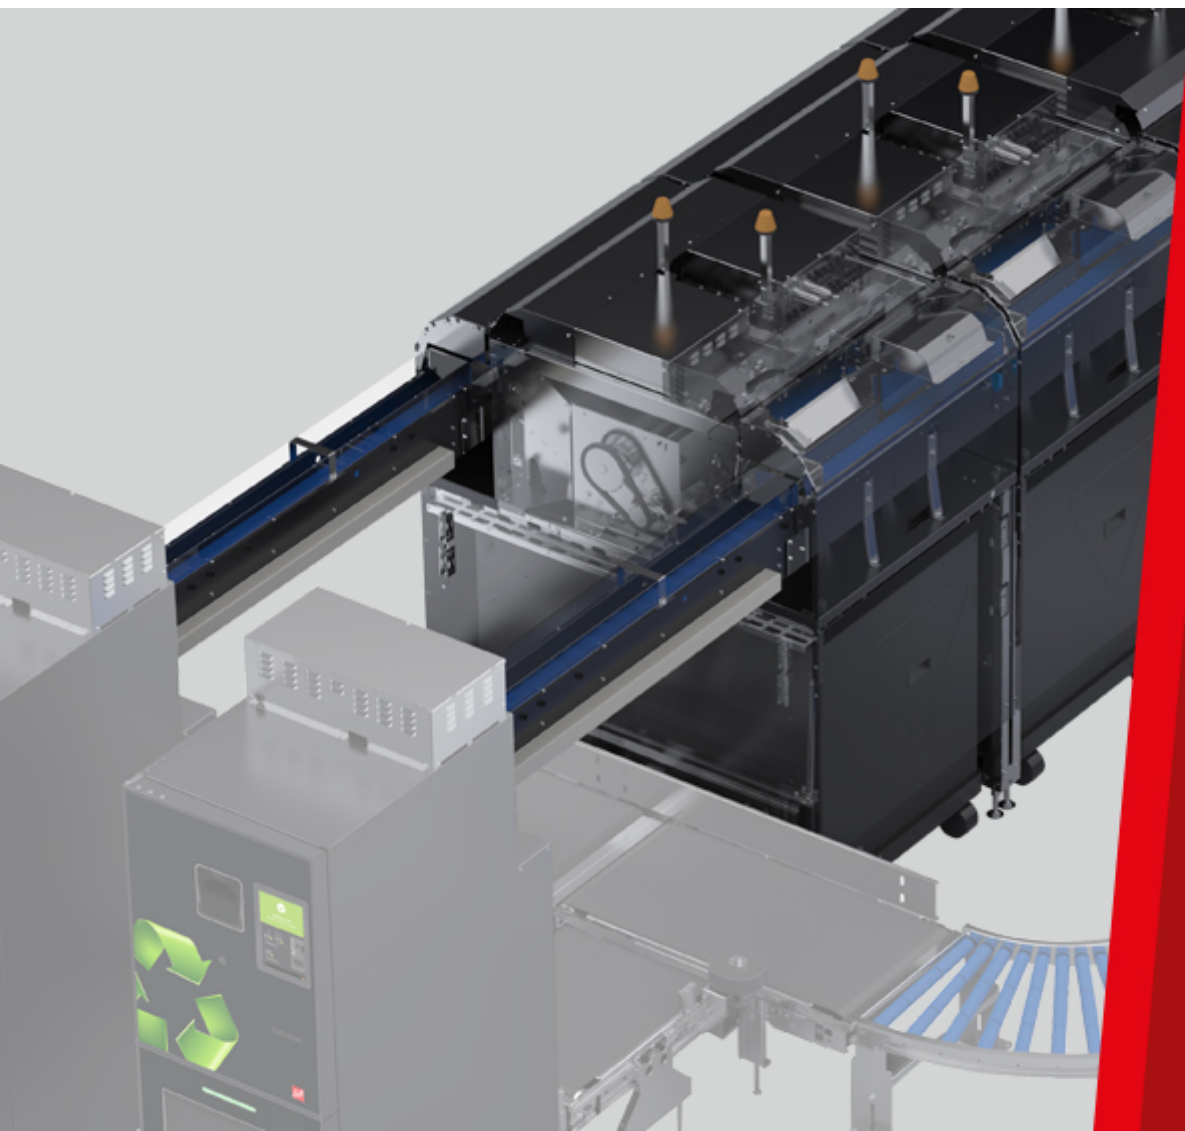

Features

- 2 compactors per housing
- Removal direction right or left
- Material separation with several housings
- Up to 7 enclosures possible
- Dynamic resorting; the equipment remains operational even if a collecting container is emptied.



SiVario 2020 Basic data

Dimensions:	1,715 x 600 x 1,080 mm (height x width x depth)*
Weight:	Approx. 330 kg
Electrical connection values:	3L/N/PE, 400 V, 50 Hz
Power consumption:	Max. 650 W, 70 W Standby
Operating temperature:	+5 °C to +40 °C non-condensing
Wall opening:	1,750 x 650 mm (height x width)

**Deviations in the housing dimensions are possible due to add-on parts and accessories.*

Container for empties

- Size: Euro pallet with 975 mm x 800 mm x 1,200 mm (height x width x depth)

Conformity

- CE, DPG-certified
- UKCA (UK Conformity Assessed)

Material separation

- Segregated collection according to material type is possible



Sielaff GmbH & Co. KG
Automatenbau Herrieden
Münchener Str. 20
91567 Herrieden
Germany

Phone: +49 9825 18-0
Telefax: +49 9825 18-311155
info@sielaff.de
www.sielaff.com

See here for our
company profile video



■ MADE
■ IN
■ GERMANY